




TPS Removal Plug


Part# AB-21184

2017 + 2 Stroke Race Edition Models

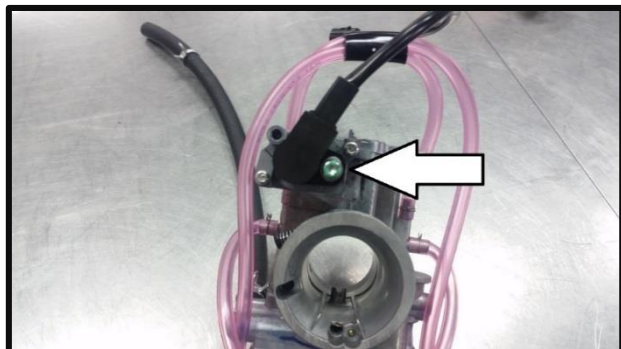

Instructions:

Remove the carburetor. Take the cable out of the slide and set the slide aside. Using the supplied T25 Torx tool, remove the TPS control switch (the black one) from the carburetor. Remove the rubber oring from the TPS and install it on the TPS plug supplied in this kit. Next remove the two H20 Torx screws with the tool supplied on the TPS lever housing.

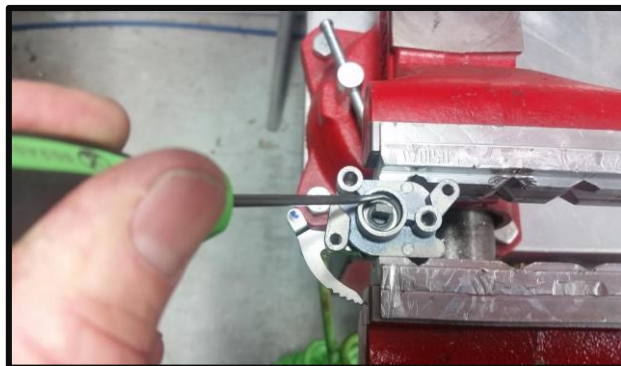

With the TPS lever and housing out, clamp the plate in a vice and remove the snap ring holding the TPS lever in place

Reinstall the TPS plate (now without the lever) and the TPS plug that is included with this kit making sure the oring is in place. Reinstall the carburetor making sure the throttle operates properly.



* This kit must be installed by a qualified motorcycle technician